

BAT120



BAT120 Features

Aluminium housing

Compatible with all products*

Small in size



Battery capacity

2 x 18650 Li-Ion cells

2300 mA

17 Wh



Alarms

Digital output

Compatibility with...

Configuration examples



Industrial design

Aluminium housing

Temperature range

Mounting options




Mounting options

Din rail kit

Compact din rail kit

Surface mounting

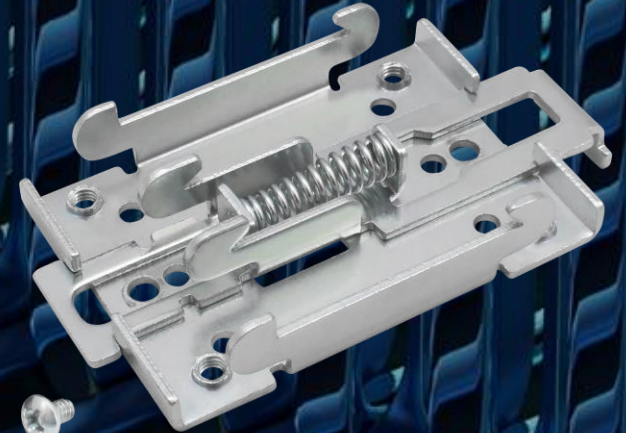

Compatibility

Routers

Gateways

Switches



Physical specifications

100 x 30 x 85 mm

315 g



Usage scenarios

ATM's


Oil & Gas

Remote locations

**Cold chain
traceability**

**Uninterrupted data
transfer**

24/7 Connectivity

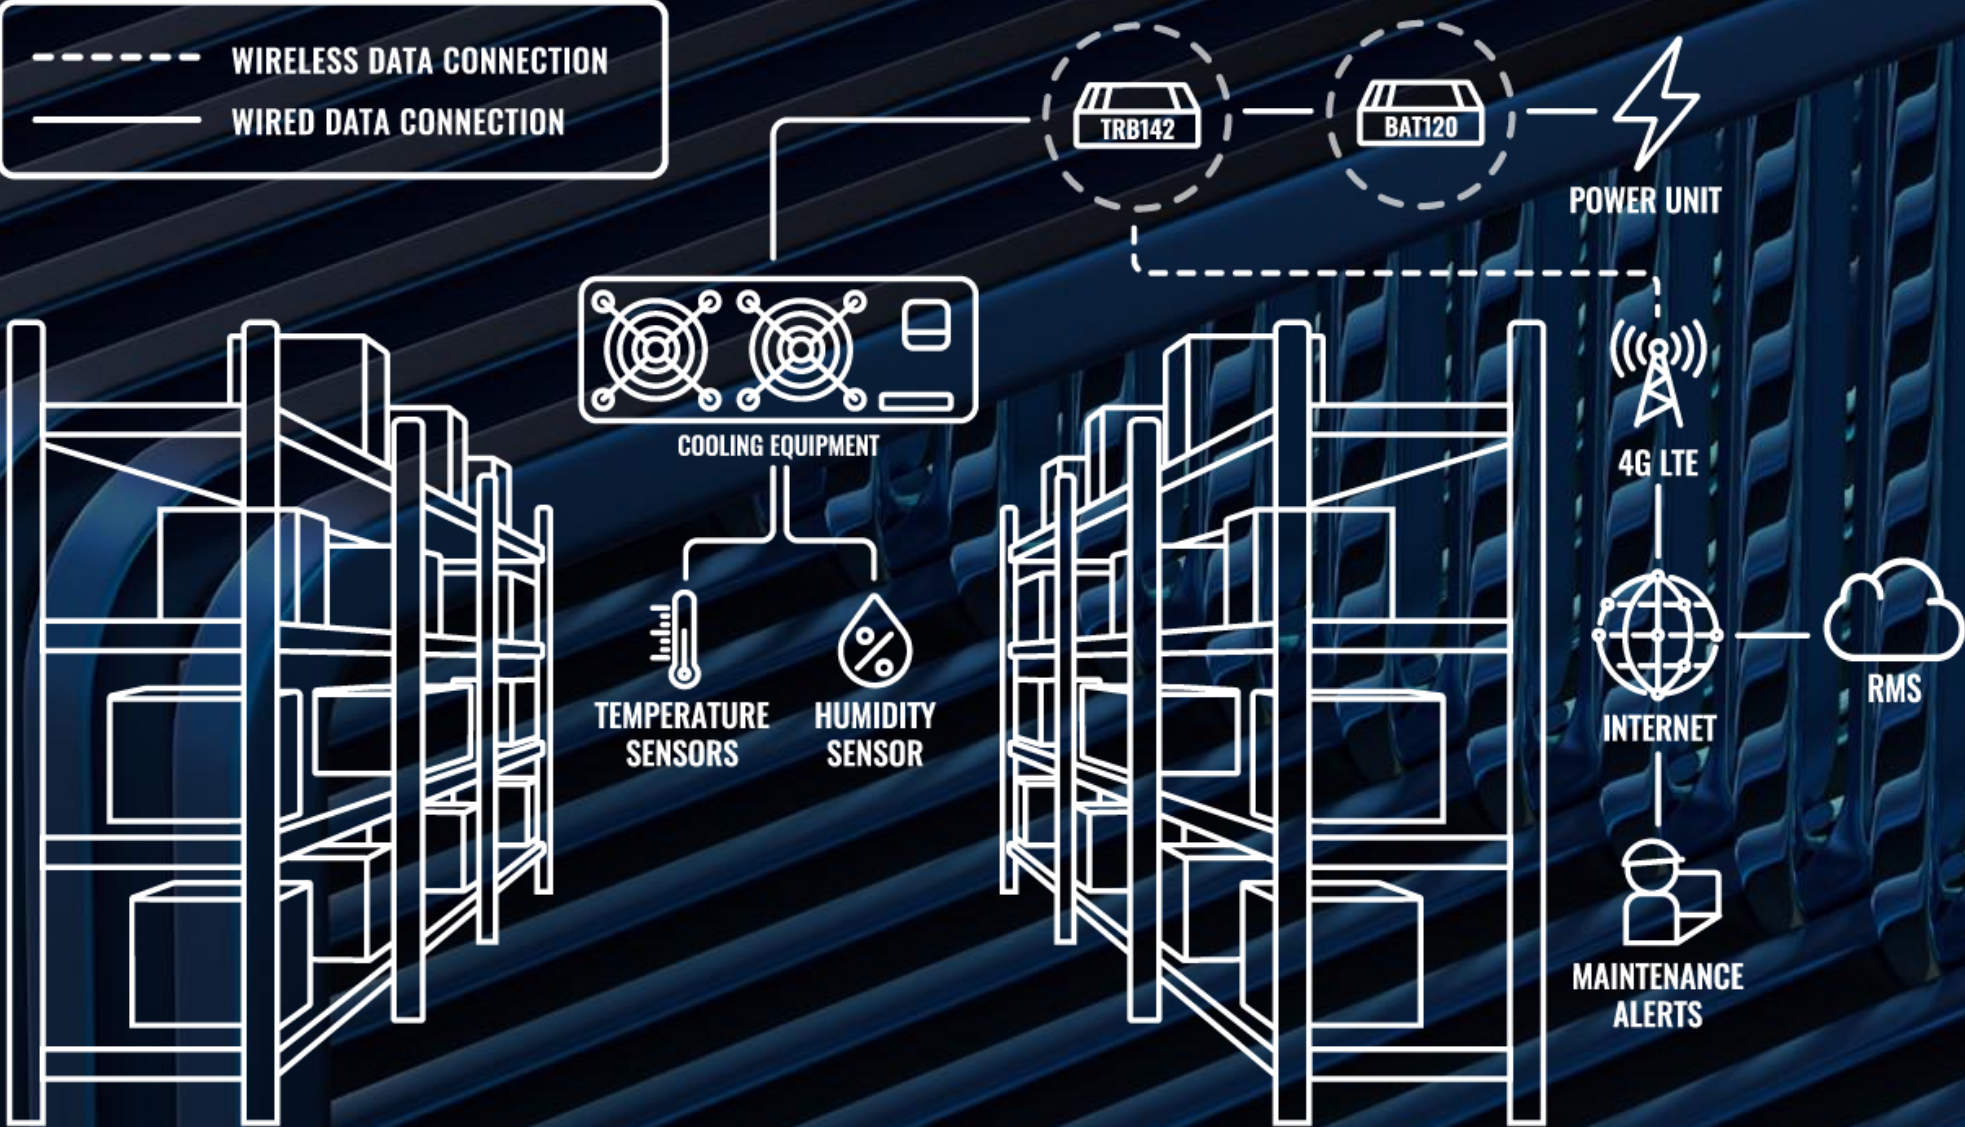

TRB142

BAT120

POWER UNIT

COOLING EQUIPMENT

TEMPERATURE
SENSORS

HUMIDITY
SENSOR

4G LTE

INTERNET

RMS

MAINTENANCE
ALERTS

Standard package contains, Ordering

BAT120

**QSG and packaging
box**

24W PSU

**Ordering:
BAT120000000**

**4-pin to 4-pin
power cable**


Code difference

Outage

Average outage – 4 hours

Battery capacity – 17 Wh

RUT240 up to 6 hours

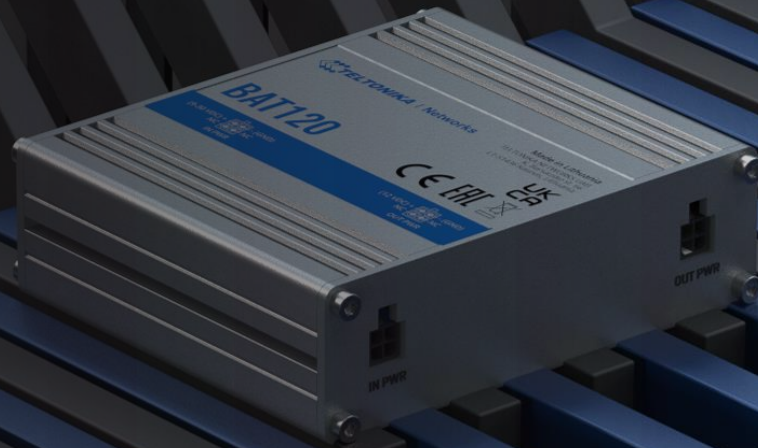



OUR SUPPORT

Wiki Knowledge Base
Crowd Support forum

SOCIAL MEDIA

